



Características	
Modelo	CAM-150W-UF
Categoría	Campana Industrial SMD ALTA POTENCIA
Material	FE+AI
Terminado	NEGRO
Pantalla	PC
Indice de Protección [IP]	IP65
Base	N/A
Dimensiones mm	ø345 H160 mm
Lúmenes	14,000 Lm
Temperatura	6000k
Parámetros Eléctricos	
Tensión Nominal [V~]	85-277 V~
Consumo de Potencia [W]	150W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	1.76A
Temperatura de Operación	0 - 40 °C
Beneficios	
Garantía	3 Año de Garantía
Certificación	NOM



Product Information

Product Type: CAM-150W-UF
Product Number: 14

Product Spec: 150W

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3179$ $y=0.3296$ $u(u')=0.2012$ $v=0.3129$ $v'=0.4694$
 CCT: $T_c=6226K$ ($duv=0.00092$) Color Ratio: $R=0.126$ $G=0.839$ $B=0.034$
 Peak Wavelength: 447.1nm Half Bandwidth: 20.6nm
 Dominant Wavelength: 488.6nm Color Purity: 0.055
 CRI: $R_a=71.4$, $avgR(1\sim14)=60.9$, $avgR(1\sim15)=61.3$ TM30: $R_f=67$, $R_g=95$
 $R1=71$ $R2=74$ $R3=74$ $R4=73$ $R5=71$ $R6=64$ $R7=80$ $R8=63$
 $R9=-20$ $R10=36$ $R11=71$ $R12=39$ $R13=70$ $R14=85$ $R15=68$
 Color Quality Scale: $Q_a=69.8$, $Q_f=68.1$, $Q_p=74.6$, $Q_g=91.0$
 $Q1=82$ $Q2=91$ $Q3=59$ $Q4=54$ $Q5=67$ $Q6=72$ $Q7=77$ $Q8=87$
 $Q9=87$ $Q10=69$ $Q11=64$ $Q12=67$ $Q13=71$ $Q14=61$ $Q15=70$

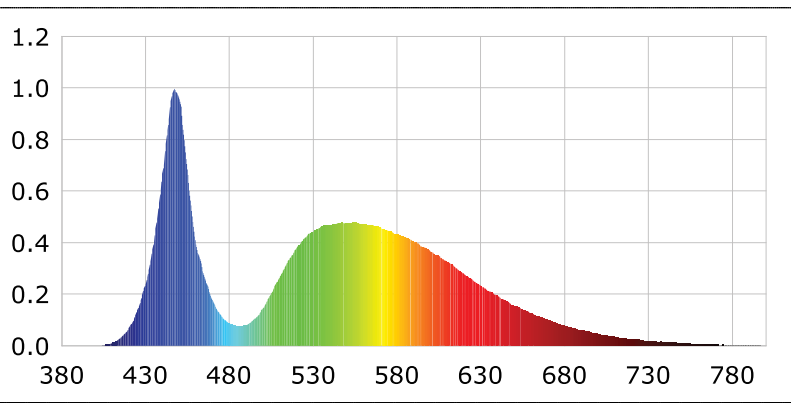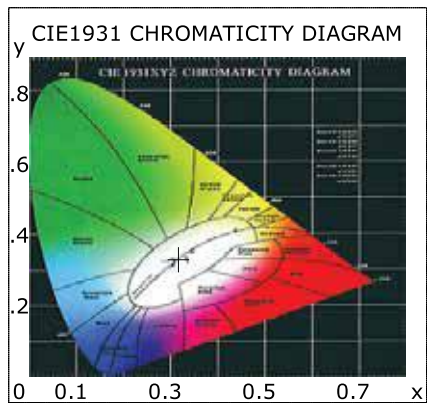

Photometric Parameters

Luminous Flux: 14405.73 lm Efficiency: 87.25 lm/W Radiant Power: 44.999 W
 EEI: 0.16 Energy Efficiency Class: A+ (EU 874-2012)
 Pupil Flux: 24218.06 Plm Pupil Lumens Per Watt: 146.69 Plm/W Pupil Factor (Kp): 1.681

Electric Parameters

Voltage: 127.20V Current: 1.3040A Power: 165.10W
 Power Factor: 0.9950 Frequency: 60.00Hz

Test Information

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 Min Photometric Condition: Sphere diameter: 1.50m, 4PI
 Max of Signal: 43663 (2682) CCD Integration Time: 80.81 ms