



Características	
Modelo	CAM-150WPLS
Categoría	Campana Industrial SMD ALTA POTENCIA
Material	AL
Terminado	ALUMINIO NAT.
Pantalla	0
Índice de Protección [IP]	IP40
Base	N/A
Dimensiones mm	Ø495*345 mm
Lúmenes	15,000 Lm
Temperatura	6000k
Parametros Eléctricos	
Tensión Nominal [V~]	85-277 V~
Consumo de Potencia [W]	150W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	1.76A
Temperatura de Operación	0 - 40 °C
Beneficios	
Garantía	3 Año de Garantía
Certificación	NOM



**Product Infomation**

Product Type: CAM-150WPLS  
Product Number: 4

Product Spec: 150W

**CIE Colorimetric Parameters**

Chromaticity coordinates: x=0.3191 y=0.3332 u(u')=0.2007 v=0.3143 v'=0.4715  
 CCT: Tc=6144K (duv=0.00215) Color Ratio: R=0.127 G=0.835 B=0.039  
 Peak Wavelength: 451.1nm Half Bandwidth: 22.1nm  
 Dominant Wavelength: 491.6nm Color Purity: 0.048  
 CRI: Ra= 73.0, avgR(1~14)= 62.4, avgR(1~15)= 62.8 TM30: Rf= 69, Rg= 93  
 R1 =71 R2 =77 R3 =78 R4 =74 R5 =71 R6 =67 R7 =83 R8 =63  
 R9 =-21 R10=42 R11=69 R12=39 R13=72 R14=87 R15=68  
 Color Quality Scale: Qa= 70.7, Qf= 69.6, Qp= 73.6, Qg= 89.5  
 Q1 =82 Q2 =94 Q3 =62 Q4 =54 Q5 =65 Q6 =71 Q7 =77 Q8 =86  
 Q9 =89 Q10=73 Q11=66 Q12=68 Q13=72 Q14=61 Q15=70

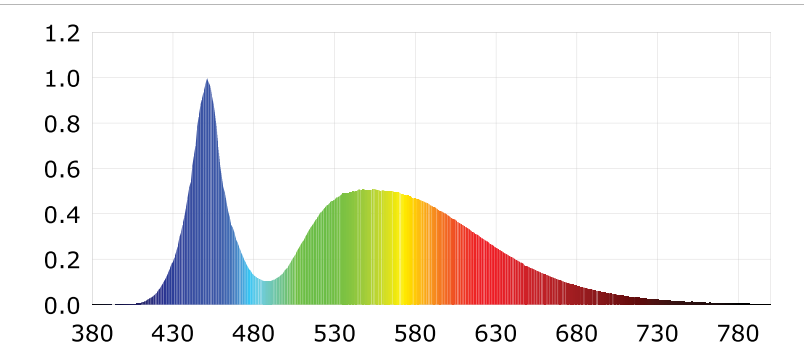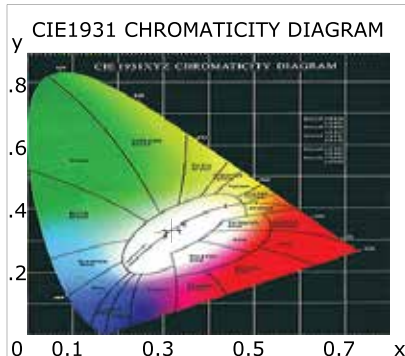

**Photometric Parameters**

Luminous Flux: 16420.44 lm Efficiency: 102.05 lm/W Radiant Power: 51.053 W  
 EEI: 0.13 Energy Efficiency Class: A+ (EU 874-2012)  
 Pupil Flux: 27987.70 Plm Pupil Lumens Per Watt: 173.94 Plm/W Pupil Factor (Kp): 1.704

**Electric Parameters**

Voltage: 127.00V Current: 1.2810A Power: 160.90W  
 Power Factor: 0.9890 Frequency: 60.00Hz

**Test Infomation**

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer  
 Stabilization Time: 0 Min Photometric Condition: Sphere diameter: 1.50m, 4PI  
 Max of Signal: 50286 (2941) CCD Integration Time: 85.17 ms