



Características	
Modelo	CAM-200WPLS
Categoría	Campana Industrial SMD ALTA POTENCIA
Material	AL
Terminado	ALUMINIO NAT.
Pantalla	0
Indice de Protección [IP]	IP40
Base	N/A
Dimensiones mm	Ø495*345 mm
Lúmenes	20,000 Lm
Temperatura	6000k
Parametros Eléctricos	
Tensión Nominal [V~]	85-277 V~
Consumo de Potencia [W]	200W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	2.34A
Temperatura de Operación	0 - 40 °C
Beneficios	
Garantía	3 Año de Garantía
Certificación	NOM



Product Information

Product Type: CAM-200WPLS
Product Number: 15

Product Spec: 200W

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3205$ $y=0.3332$ $u(u')=0.2016$ $v=0.3145$ $v'=0.4717$
 CCT: $T_c=6076K$ ($duv=0.00152$) Color Ratio: $R=0.128$ $G=0.835$ $B=0.037$
 Peak Wavelength: 450.8nm Half Bandwidth: 21.3nm
 Dominant Wavelength: 491.6nm Color Purity: 0.043
 CRI: $R_a=72.7$, $avgR(1\sim14)=62.1$, $avgR(1\sim15)=62.5$ TM30: $R_f=69$, $R_g=94$
 $R_1=71$ $R_2=76$ $R_3=77$ $R_4=73$ $R_5=71$ $R_6=67$ $R_7=82$ $R_8=63$
 $R_9=-21$ $R_{10}=41$ $R_{11}=69$ $R_{12}=39$ $R_{13}=72$ $R_{14}=87$ $R_{15}=68$
 Color Quality Scale: $Q_a=70.3$, $Q_f=69.1$, $Q_p=73.6$, $Q_g=89.9$
 $Q_1=82$ $Q_2=93$ $Q_3=61$ $Q_4=53$ $Q_5=65$ $Q_6=71$ $Q_7=77$ $Q_8=86$
 $Q_9=88$ $Q_{10}=72$ $Q_{11}=66$ $Q_{12}=68$ $Q_{13}=71$ $Q_{14}=61$ $Q_{15}=70$

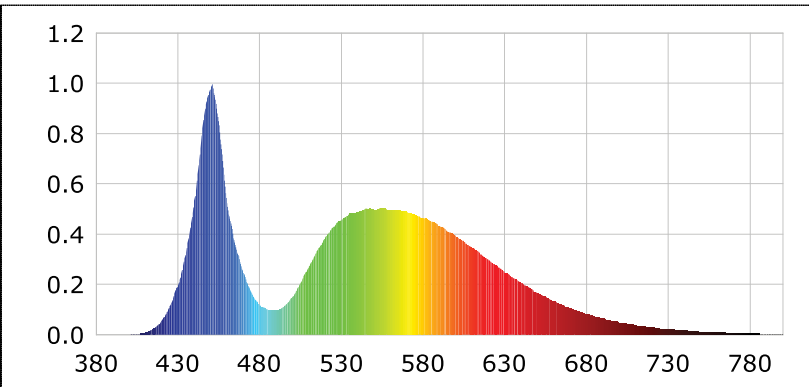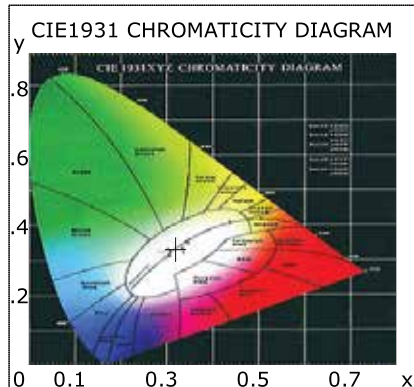

Photometric Parameters

Luminous Flux: 19709.28 lm Efficiency: 91.08 lm/W Radiant Power: 61.230 W
 EEI: 0.15 Energy Efficiency Class: A+ (EU 874-2012)
 Pupil Flux: 33287.52 Plm Pupil Lumens Per Watt: 153.82 Plm/W Pupil Factor (Kp): 1.689

Electric Parameters

Voltage: 127.10V Current: 1.7210A Power: 216.40W
 Power Factor: 0.9890 Frequency: 60.00Hz

Test Information

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 Min Photometric Condition: Sphere diameter: 1.50m, 4PI
 Max of Signal: 54187 (2671) CCD Integration Time: 68.68 ms