



Product Information



Product Type: DLM-DLSC12WBB
Product Number: 30

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3138$ $y=0.3235$ $u(u')=0.2007$ $v=0.3104$ $v'=0.4655$
 CCT: $T_c=6486K$ ($duv=-0.00020$)
 Peak Wavelength: 445.3nm
 Dominant Wavelength: 494.5nm
 CRI: $R_a=70.4$, $avgR(1\sim14)=60.0$, $avgR(1\sim15)=60.6$ TM30: $R_f=65$, $R_g=96$
 $R_1=71$ $R_2=72$ $R_3=71$ $R_4=73$ $R_5=72$ $R_6=63$ $R_7=78$ $R_8=64$
 $R_9=-20$ $R_{10}=32$ $R_{11}=72$ $R_{12}=41$ $R_{13}=70$ $R_{14}=83$ $R_{15}=68$
 Color Quality Scale: $Q_a=69.5$, $Q_f=67.2$, $Q_p=75.5$, $Q_g=91.8$
 $Q_1=82$ $Q_2=90$ $Q_3=59$ $Q_4=55$ $Q_5=68$ $Q_6=73$ $Q_7=77$ $Q_8=88$
 $Q_9=85$ $Q_{10}=67$ $Q_{11}=62$ $Q_{12}=65$ $Q_{13}=70$ $Q_{14}=61$ $Q_{15}=70$

Product Spec: 12W

Características	
Modelo	DLM-DLSC12WBB
Categoría	Panel Downlight Sobreponer
Material	AL+PMMA
Terminado	BLANCO
Pantalla	0
Índice de Protección [IP]	IP40
Base	N/A
Dimensiones mm	Ø170*33mm
Lúmenes	900/860 Lm
Temperatura	6000K
Parámetros Eléctricos	
Tensión Nominal [V~]	85-265 V~
Consumo de Potencia [W]	12W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	0.14A
Temperatura de Operación	0 - 40 °C
Beneficios	
Garantía	2 Año de Garantía
Certificación	NOM

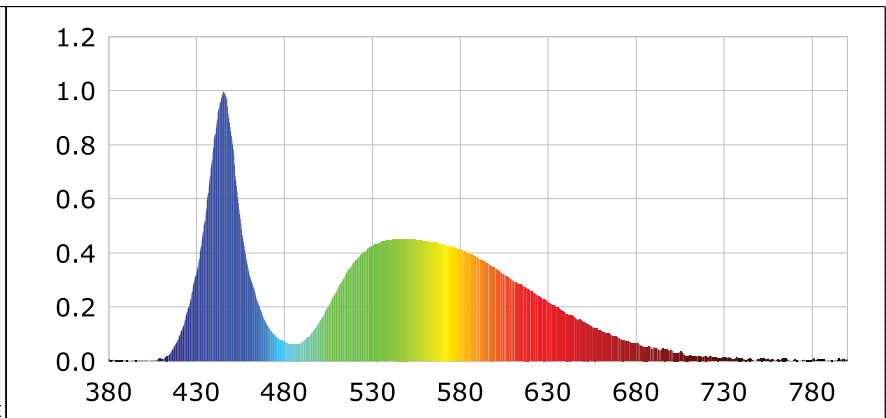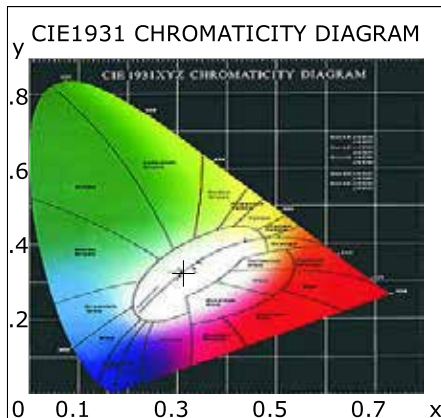

Photometric Parameters

Luminous Flux: 930.54 lm Efficiency: 76.40 lm/W Radiant Power: 2.934 W
 EEI: 0.17 Energy Efficiency Class: A+ (EU 874-2012)
 Pupil Flux: 1570.38 Plm Pupil Lumens Per Watt: 128.93 Plm/W Pupil Factor (Kp): 1.688

Electric Parameters

Voltage: 127.10V Current: 0.1610A Power: 12.18W
 Power Factor: 0.5940 Frequency: 60.00Hz

Test Information

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 Min Photometric Condition: Sphere diameter: 1.50m, 4PI
 Max of Signal: 45872 (3939) CCD Integration Time: 1129.31 ms