



Características	
Modelo	DLM-DLSR12W
Aplicación	Panel Downlight Sobreponer
Material	AL+PMMA
Terminado	PLATA
Pantalla	0
Índice de Protección [IP]	IP40
Base	N/A
Dimensiones mm	Ø170*33mm
Lúmenes	900/850 Lm
Temperatura	6000K / 3500K
Parámetros Eléctricos	
Tensión Nominal [V~]	85-265 V~
Consumo de Potencia [W]	12W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	0.14A
Temperatura de Operación	0 - 40 °C
Beneficios	
Garantía	2 Año de Garantía
Certificación	NOM



Product Infomation

Product Type: DLM-DL12W
Product Number: 108

Product Spec: 12W

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3179$ $y=0.3236$ $u(u')=0.2035$ $v=0.3108$ $v'=0.4662$
 CCT: $T_c=6258K$ ($duv=-0.00223$) Color Ratio: $R=0.127$ $G=0.843$ $B=0.030$
 Peak Wavelength: 445.0nm Half Bandwidth: 21.2nm
 Dominant Wavelength: 483.1nm Color Purity: 0.060
 CRI: $R_a=69.4$, $avgR(1\sim14)=59.0$, $avgR(1\sim15)=59.6$ TM30: $R_f=63$, $R_g=97$
 $R_1=71$ $R_2=71$ $R_3=69$ $R_4=72$ $R_5=71$ $R_6=62$ $R_7=76$ $R_8=63$
 $R_9=-21$ $R_{10}=30$ $R_{11}=72$ $R_{12}=40$ $R_{13}=69$ $R_{14}=82$ $R_{15}=67$
 Color Quality Scale: $Q_a=68.0$, $Q_f=65.4$, $Q_p=74.8$, $Q_g=92.3$
 $Q_1=81$ $Q_2=89$ $Q_3=56$ $Q_4=53$ $Q_5=67$ $Q_6=71$ $Q_7=76$ $Q_8=88$
 $Q_9=84$ $Q_{10}=65$ $Q_{11}=59$ $Q_{12}=63$ $Q_{13}=68$ $Q_{14}=60$ $Q_{15}=69$

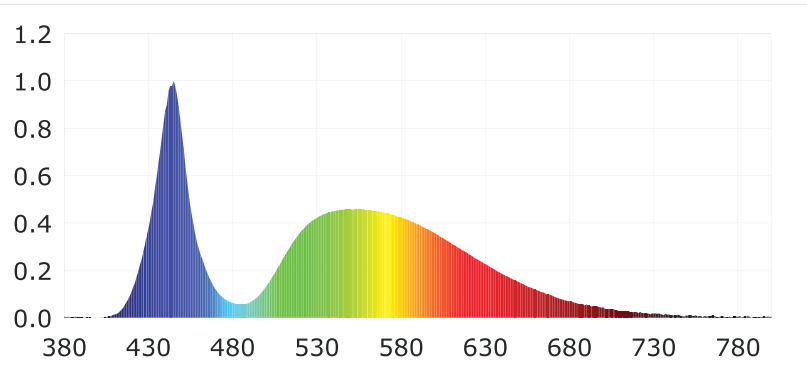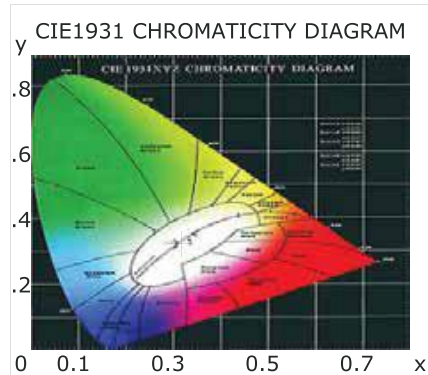

Photometric Parameters

Luminous Flux: 873.99 lm Efficiency: 71.58 lm/W Radiant Power: 2.757 W
 EEI: 0.18 Energy Efficiency Class: A (EU 874-2012)
 Pupil Flux: 1437.90 Plm Pupil Lumens Per Watt: 117.76 Plm/W Pupil Factor (Kp): 1.645

Electric Parameters

Voltage: 127.20V Current: 0.1590A Power: 12.21W
 Power Factor: 0.6060 Frequency: 60.00Hz

Test Infomation

Scan Range: 380~800:1nm
 Stabilization Time: 0 Min
 Max of Signal: 45875 (2526)

Photometric Method: sphere-spectroradiometer
 Photometric Condition: Sphere diameter: 1.50m, 4PI
 CCD Integration Time: 921.32 ms