





Product Type: DLM-DLSC24WBB
Product Number: 96

Características	
Modelo	DLM-DLSR24WBB
Aplicación	Panel Downlight Sobreponer
Material	AL+PMMA
Terminado	BLANCO
Pantalla	0
Índice de Protección [IP]	IP40
Base	N/A
Dimensiones mm	∅300*33mm
Lúmenes	1800Lm
Temperatura	6000K
Parámetros Eléctricos	
Tensión Nominal [V~]	85-265 V~
Consumo de Potencia [W]	24W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	0.28A
Temperatura de Operación	0 - 40 °C
Beneficios	
Garantía	2 Año de Garantía
Certificación	NOM

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3096$ $y=0.3213$ $u(u')=0.1985$ $v=0.3091$ $v'=0.4637$
 CCT: $T_c=6752K$ ($duv=0.00083$) Color Ratio: $R=0.122$ $G=0.839$ $B=0.039$
 Peak Wavelength: 448.9nm Half Bandwidth: 23.0nm
 Dominant Wavelength: 485.0nm Color Purity: 0.090
 CRI: $R_a=72.9$, $avgR(1\sim14)=62.6$, $avgR(1\sim15)=63.1$ TM30: $R_f=68$, $R_g=95$
 $R_1=72$ $R_2=75$ $R_3=75$ $R_4=75$ $R_5=73$ $R_6=66$ $R_7=82$ $R_8=65$
 $R_9=-17$ $R_{10}=39$ $R_{11}=72$ $R_{12}=41$ $R_{13}=72$ $R_{14}=86$ $R_{15}=69$
 Color Quality Scale: $Q_a=70.9$, $Q_f=69.3$, $Q_p=75.2$, $Q_g=90.6$
 $Q_1=83$ $Q_2=92$ $Q_3=62$ $Q_4=55$ $Q_5=67$ $Q_6=73$ $Q_7=78$ $Q_8=87$
 $Q_9=87$ $Q_{10}=71$ $Q_{11}=65$ $Q_{12}=67$ $Q_{13}=71$ $Q_{14}=62$ $Q_{15}=71$

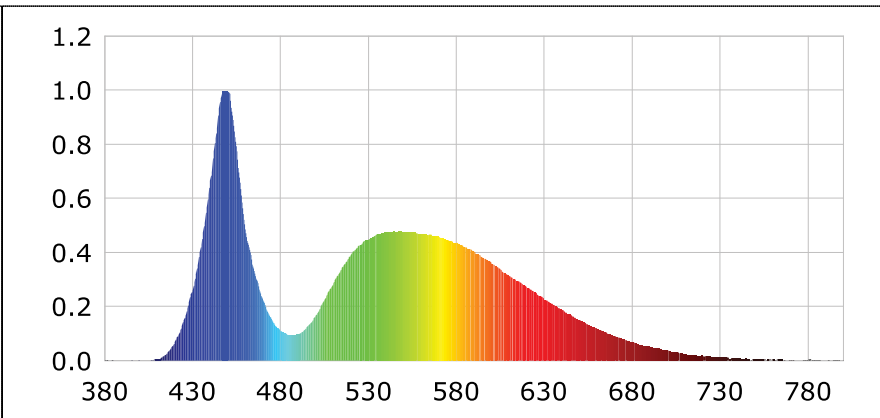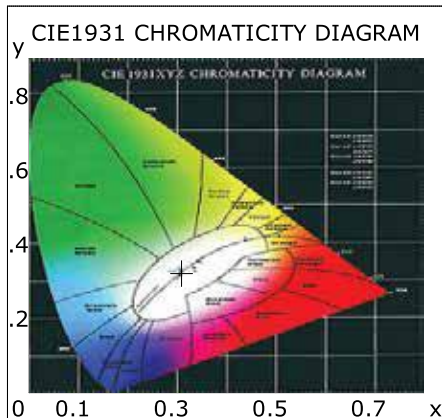

Photometric Parameters

Luminous Flux: 2189.52 lm Efficiency: 86.00 lm/W Radiant Power: 6.925 W
 EEI: 0.16 Energy Efficiency Class: A+ (EU 874-2012)
 Pupil Flux: 3835.50 Plm Pupil Lumens Per Watt: 150.65 Plm/W Pupil Factor (Kp): 1.752

Electric Parameters

Voltage: 127.00V Current: 0.3240A Power: 25.46W
 Power Factor: 0.6180 Frequency: 60.00Hz

Test Information

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 Min Photometric Condition: Sphere diameter: 1.50m, 4PI
 Max of Signal: 46147 (2840) CCD Integration Time: 442.20 ms