



Características	
Modelo	DLM-DLSR7WBB
Aplicación	Panel Downlight Sobreponer
Material	AL+PMMA
Terminado	PLATA
Pantalla	0
Indice de Protección [IP]	IP40
Base	N/A
Dimensiones mm	Ø115*33mm
Lúmenes	525 Lm
Temperatura	6000K
Parametros Eléctricos	
Tensión Nominal [V~]	85-265 V~
Consumo de Potencia [W]	7W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	0.08A
Temperatura de Operación	0 - 40 °C
Beneficios	
Garantía	2 Año de Garantía
Certificación	NOM



Product Infomation

Product Type: DLM-DLSR-7WBB
Product Number: 102

Product Spec: 7W

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3182$ $y=0.3221$ $u(u')=0.2043$ $v=0.3103$ $v'=0.4654$
 CCT: $T_c=6248K$ ($duv=-0.00318$) Color Ratio: $R=0.132$ $G=0.831$ $B=0.037$
 Peak Wavelength: 448.5nm Half Bandwidth: 23.8nm
 Dominant Wavelength: 481.4nm Color Purity: 0.061
 CRI: $R_a=74.1$, $avgR(1\sim14)=64.7$, $avgR(1\sim15)=65.3$ TM30: $R_f=68$, $R_g=96$
 $R_1=75$ $R_2=76$ $R_3=74$ $R_4=76$ $R_5=75$ $R_6=67$ $R_7=81$ $R_8=68$
 $R_9=-3$ $R_{10}=41$ $R_{11}=74$ $R_{12}=43$ $R_{13}=74$ $R_{14}=85$ $R_{15}=73$
 Color Quality Scale: $Q_a=70.6$, $Q_f=68.6$, $Q_p=76.1$, $Q_g=93.1$
 $Q_1=84$ $Q_2=91$ $Q_3=59$ $Q_4=53$ $Q_5=67$ $Q_6=74$ $Q_7=79$ $Q_8=88$
 $Q_9=85$ $Q_{10}=69$ $Q_{11}=63$ $Q_{12}=66$ $Q_{13}=71$ $Q_{14}=66$ $Q_{15}=74$

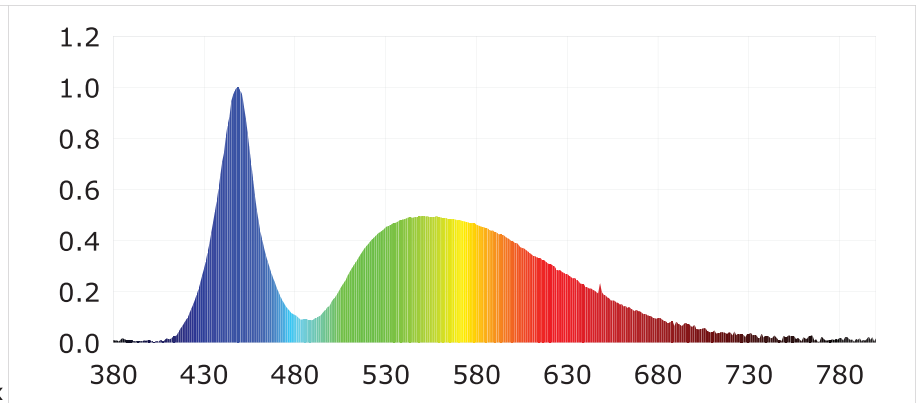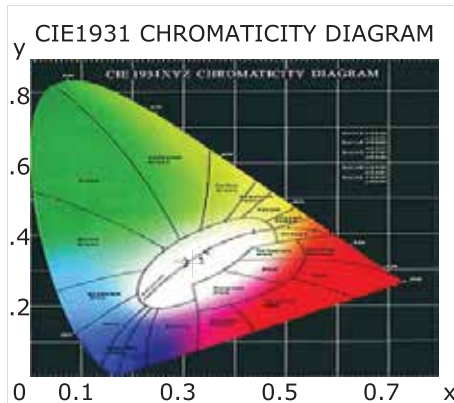

Photometric Parameters

Luminous Flux: 355.08 lm Efficiency: 52.92 lm/W Radiant Power: 1.151 W
 EEI: 0.20 Energy Efficiency Class: A (EU 874-2012)
 Pupil Flux: 601.63 Plm Pupil Lumens Per Watt: 89.66 Plm/W Pupil Factor (Kp): 1.694

Electric Parameters

Voltage: 127.40V Current: 0.0880A Power: 6.71W
 Power Factor: 0.5970 Frequency: 60.00Hz

Test Infomation

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 Min Photometric Condition: Sphere diameter: 1.50m, 4PI
 Max of Signal: 43053 (4455) CCD Integration Time: 2276.25 ms