





Características	
Modelo	DLM-PDL7WBB
Categoría	Panel Downlight Slim
Material	AL+PMMA
Terminado	ALUMINIO
Pantalla	0
Indice de Protección [IP]	IP40
Base	N/A
Dimensiones mm	Ø116*100*10mm
Lúmenes	530 Lm
Temperatura	6000K
Parametros Eléctricos	
Tensión Nominal [V~]	85-265 V~
Consumo de Potencia [W]	7W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	0.08A
Temperatura de Operación	0 - 40 °C
Beneficios	
Garantía	2 Año de Garantía
Certificación	NOM

Product Type: DLM-PDL-7WBB
Product Number: 101

Product Spec: 7W

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3203$ $y=0.3246$ $u(u')=0.2048$ $v=0.3114$ $v'(v')=0.4671$
 CCT: $T_c=6122K$ ($duv=-0.00291$) Color Ratio: $R=0.133$ $G=0.831$ $B=0.036$
 Peak Wavelength: 448.4nm Half Bandwidth: 23.1nm
 Dominant Wavelength: 482.5nm Color Purity: 0.051
 CRI: $R_a=74.0$, $avgR(1\sim14)=64.7$, $avgR(1\sim15)=65.2$ TM30: $R_f=68$, $R_g=97$
 $R_1=75$ $R_2=77$ $R_3=74$ $R_4=76$ $R_5=75$ $R_6=67$ $R_7=81$ $R_8=68$
 $R_9=-4$ $R_{10}=41$ $R_{11}=74$ $R_{12}=43$ $R_{13}=74$ $R_{14}=85$ $R_{15}=73$
 Color Quality Scale: $Q_a=70.7$, $Q_f=68.7$, $Q_p=76.0$, $Q_g=93.1$
 $Q_1=84$ $Q_2=91$ $Q_3=59$ $Q_4=54$ $Q_5=67$ $Q_6=73$ $Q_7=78$ $Q_8=88$
 $Q_9=86$ $Q_{10}=69$ $Q_{11}=64$ $Q_{12}=67$ $Q_{13}=71$ $Q_{14}=66$ $Q_{15}=73$

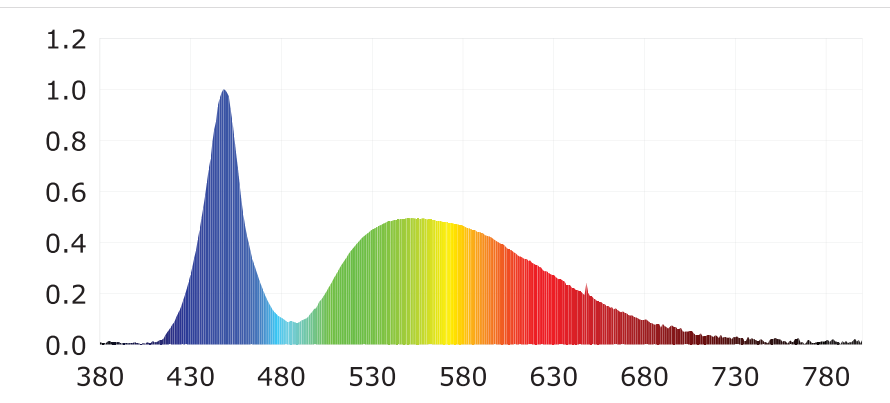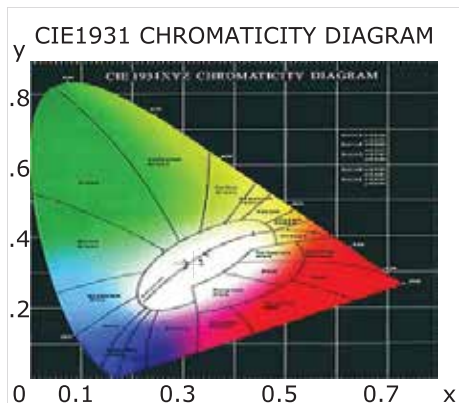

Photometric Parameters

Luminous Flux: 374.73 lm Efficiency: 57.21 lm/W Radiant Power: 1.203 W
 EEI: 0.19 Energy Efficiency Class: A (EU 874-2012)
 Pupil Flux: 630.45 Plm Pupil Lumens Per Watt: 96.25 Plm/W Pupil Factor (Kp): 1.682

Electric Parameters

Voltage: 127.50V Current: 0.0860A Power: 6.55W
 Power Factor: 0.5970 Frequency: 60.00Hz

Test Information

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 Min Photometric Condition: Sphere diameter: 1.50m, 4PI
 Max of Signal: 45265 (4302) CCD Integration Time: 2276.25 ms