



Características	
Modelo	ML-RPS-600WSMD
Categoría	Reflector Industriales
Material	0
Terminado	PLATA
Pantalla	0
Indice de Protección [IP]	IP65
Base	N/A
Dimensiones mm	795*465*115 mm
Lúmenes	63000 Lm
Temperatura	6500k
Parámetros Eléctricos	
Tensión Nominal [V~]	85- 305 V~
Consumo de Potencia [W]	600W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	7.05A
Temperatura de Operación	0 - 40 °C
Beneficios	
Garantía	3 Año de Garantía
Certificación	NOM



Product Information

Product Type: ML-RPS-600WSMD
Product Number: 6

Product Spec: 600W

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3156$ $y=0.3445$ $u(u')=0.1941$ $v=0.3179$ $v'=0.4768$
 CCT: $T_c=6264K$ ($duv=0.00954$) Color Ratio: $R=0.130$ $G=0.820$ $B=0.051$
 Peak Wavelength: 450.8nm Half Bandwidth: 21.4nm
 Dominant Wavelength: 511.0nm Color Purity: 0.055
 CRI: $R_a=80.7$, $avgR(1\sim14)=72.3$, $avgR(1\sim15)=72.2$ TM30: $R_f=80$, $R_g=94$
 $R_1=78$ $R_2=84$ $R_3=90$ $R_4=80$ $R_5=79$ $R_6=80$ $R_7=88$ $R_8=67$
 $R_9=-4$ $R_{10}=64$ $R_{11}=79$ $R_{12}=54$ $R_{13}=79$ $R_{14}=95$ $R_{15}=72$
 Color Quality Scale: $Q_a=81.3$, $Q_f=81.4$, $Q_p=81.0$, $Q_g=90.3$
 $Q_1=83$ $Q_2=98$ $Q_3=78$ $Q_4=74$ $Q_5=80$ $Q_6=81$ $Q_7=84$ $Q_8=89$
 $Q_9=97$ $Q_{10}=86$ $Q_{11}=84$ $Q_{12}=83$ $Q_{13}=83$ $Q_{14}=69$ $Q_{15}=74$

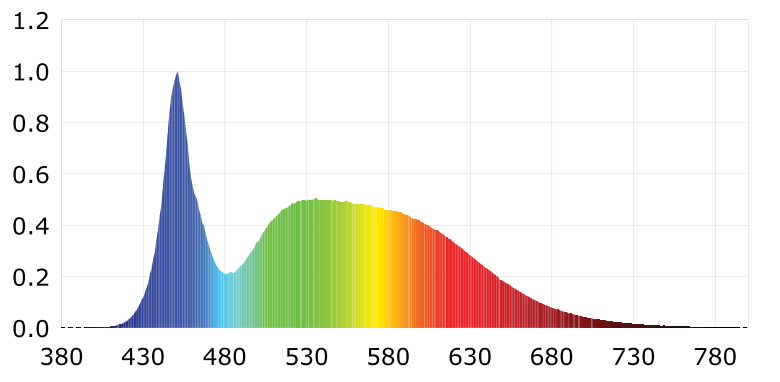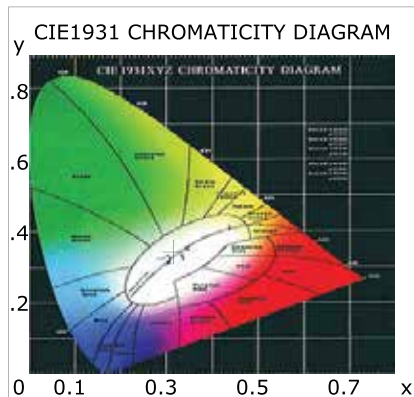

Photometric Parameters

Luminous Flux: 59074.52 lm Efficiency: 183.50 lm/W Radiant Power: 183.730 W
 EEI: 0.12 Energy Efficiency Class: A++ (EU 874-2012)
 Pupil Flux: 108779.81 Plm Pupil Lumens Per Watt: 0.00 Plm/W Pupil Factor (Kp): 1.841

Electric Parameters

Voltage: 219.10V Current: 2.7135A Power: 592.8W
 Power Factor: 0.9970 Frequency: 60.00Hz

Test Information

Scan Range: 380~800:1nm
 Stabilization Time: 0 Min
 Max of Signal: 49189 (2628)

Photometric Method: sphere-spectroradiometer
 Photometric Condition: Sphere diameter: 1.50m, 4PI
 CCD Integration Time: 20.00 ms



Características	
Modelo	ML-RPS-600WSMD
Categoría	Reflector Industriales
Material	0
Terminado	PLATA
Pantalla	0
Indice de Protección [IP]	IP65
Base	N/A
Dimensiones mm	795*465*115 mm
Lúmenes	63000 Lm
Temperatura	6500k
Parametros Eléctricos	
Tensión Nominal [V~]	85-305 V~
Consumo de Potencia [W]	600W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	7.05A
Temperatura de Operación	0 - 40 °C
Beneficios	
Garantía	3 Año de Garantía
Certificación	NOM



Product Infomation

Product Type: ML-RPS-600WSMD
Product Number: 6

Product Spec: 600W

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3156$ $y=0.3445$ $u(u')=0.1941$ $v=0.3179$ $v'=0.4768$
 CCT: $T_c=6264K$ ($duv=0.00954$) Color Ratio: $R=0.130$ $G=0.820$ $B=0.051$
 Peak Wavelength: 450.8nm Half Bandwidth: 21.4nm
 Dominant Wavelength: 511.0nm Color Purity: 0.055
 CRI: $R_a=80.7$, $avgR(1\sim14)=72.3$, $avgR(1\sim15)=72.2$ TM30: $R_f=80$, $R_g=94$
 $R_1=78$ $R_2=84$ $R_3=90$ $R_4=80$ $R_5=79$ $R_6=80$ $R_7=88$ $R_8=67$
 $R_9=-4$ $R_{10}=64$ $R_{11}=79$ $R_{12}=54$ $R_{13}=79$ $R_{14}=95$ $R_{15}=72$
 Color Quality Scale: $Q_a=81.3$, $Q_f=81.4$, $Q_p=81.0$, $Q_g=90.3$
 $Q_1=83$ $Q_2=98$ $Q_3=78$ $Q_4=74$ $Q_5=80$ $Q_6=81$ $Q_7=84$ $Q_8=89$
 $Q_9=97$ $Q_{10}=86$ $Q_{11}=84$ $Q_{12}=83$ $Q_{13}=83$ $Q_{14}=69$ $Q_{15}=74$

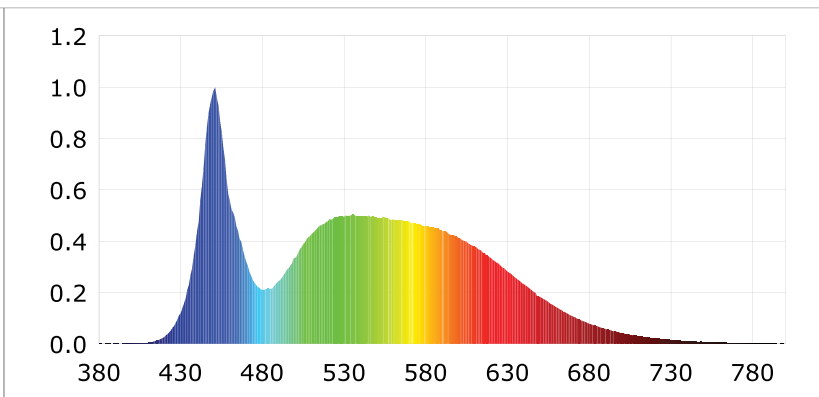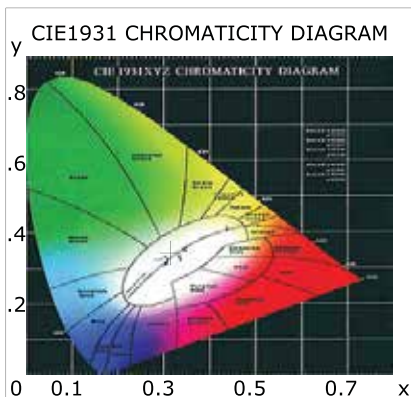

Photometric Parameters

Luminous Flux: 59074.52 lm Efficiency: 191.055 lm/W Radiant Power: 183.730 W
 EEI: 0.12 Energy Efficiency Class: A++ (EU 874-2012)
 Pupil Flux: 108779.81 Plm Pupil Lumens Per Watt: 0.00 Plm/W Pupil Factor (Kp): 1.841

Electric Parameters

Voltage: 219.43V Current: 2.6064A Power: 569.36W
 Power Factor: 0.9970 Frequency: 60.00Hz

Test Infomation

Scan Range: 380~800:1nm
 Stabilization Time: 0 Min
 Max of Signal: 49189 (2628)

Photometric Method: sphere-spectroradiometer
 Photometric Condition: Sphere diameter: 1.50m, 4PI
 CCD Integration Time: 20.00 ms