





Características	
Modelo	PSM-021C
Categoría	Luminaria Solar de Pared c/Panel solar incluido
Material	0
Terminado	NEGRO
Pantalla	0
Indice de Protección [IP]	0
Base	N/A
Dimensiones mm	190*110*30 mm
Lúmenes	350Lm
Temperatura	6500K
Parametros Eléctricos	
Tensión Nominal [V~]	5.5Vcd
Consumo de Potencia [W]	3W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	0.03A
Temperatura de Operación	0 - 40 °C
Beneficios	
Garantía	2 Años de Garantía
Certificación	

Product Type: PSM-021C
Product Spec: 3W

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3087$ $y=0.3301$ $u(u')=0.1946$ $v=0.3122$ $v'=0.4683$
 CCT: $T_c=6716K$ ($duv=0.00580$) Color Ratio: $R=0.130$ $G=0.808$ $B=0.062$
 Peak Wavelength: 453.2nm Half Bandwidth: 23.2nm
 Dominant Wavelength: 500.0nm Color Purity: 0.085
 CRI: $R_a=82.9$, $avgR(1\sim14)=75.4$, $avgR(1\sim15)=75.5$ TM30: $R_f=80$, $R_g=92$
 $R_1=81$ $R_2=90$ $R_3=93$ $R_4=79$ $R_5=81$ $R_6=85$ $R_7=87$ $R_8=68$
 $R_9=3$ $R_{10}=75$ $R_{11}=78$ $R_{12}=56$ $R_{13}=84$ $R_{14}=97$ $R_{15}=76$
 Color Quality Scale: $Q_a=80.9$, $Q_f=81.2$, $Q_p=79.9$, $Q_g=89.2$
 $Q_1=81$ $Q_2=98$ $Q_3=81$ $Q_4=72$ $Q_5=76$ $Q_6=78$ $Q_7=83$ $Q_8=89$
 $Q_9=97$ $Q_{10}=90$ $Q_{11}=84$ $Q_{12}=83$ $Q_{13}=82$ $Q_{14}=70$ $Q_{15}=75$

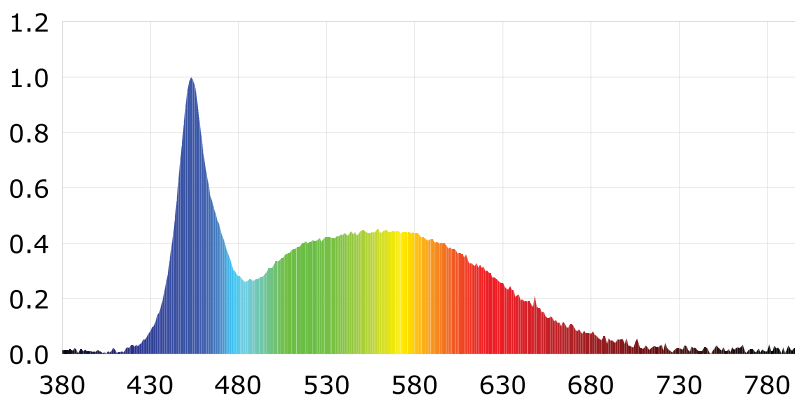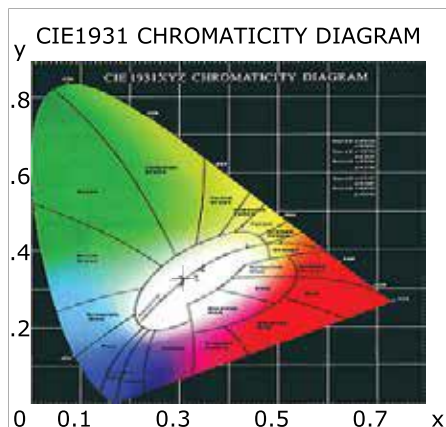

Photometric Parameters

Luminous Flux: 360.80 lm Efficiency: 0.00 lm/W Radiant Power: 1.172 W
 EEI: 0.00 Energy Efficiency Class: A++ (EU 874-2012)
 Pupil Flux: 697.15 Plm Pupil Lumens Per Watt: 0.00 Plm/W Pupil Factor (Kp): 1.932

Electric Parameters

Voltage: 0.00V Current: 0.0000A Power: 0.00W
 Power Factor: 0.0000 Frequency: 0.00Hz

Test Information

Scan Range: 380~800:1nm
 Stabilization Time: 0 Min
 Max of Signal: 3913 (2834)

Photometric Method: sphere-spectroradiometer
 Photometric Condition: Sphere diameter: 1.50m, 4PI
 CCD Integration Time: 200.00 ms