



Características	
Modelo	RBX-30W-BB
Aplicación	Refectores Slim SDM
Material	AL+PC
Terminado	PLATA.NEGRO
Pantalla	0
Índice de Protección [IP]	IP65
Base	N/A
Dimensiones mm	162*149*33 mm
Lúmenes	2850 Lm
Temperatura	6000K
Parametros Eléctricos	
Tensión Nominal [V~]	85-265 V~
Consumo de Potencia [W]	30W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	0
Temperatura de Operación	0 - 40 °C
Beneficios	
Garantía	2 Año de Garantía
Certificación	NOM



Product Information

Product Type: RBX-30W-BB
Product Number: 153

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3045$ $y=0.3181$ $u(u')=0.1962$ $v=0.3074$ $v'=0.4612$
 CCT: $T_c=7098K$ ($duv=0.00181$)
 Peak Wavelength: 453.7nm
 Dominant Wavelength: 484.6nm
 CRI: $R_a=83.6$, $avgR(1\sim14)=76.4$, $avgR(1\sim15)=76.6$ TM30: $R_f=80$, $R_g=94$
 $R_1=82$ $R_2=89$ $R_3=91$ $R_4=82$ $R_5=82$ $R_6=83$ $R_7=88$ $R_8=71$
 $R_9=11$ $R_{10}=72$ $R_{11}=81$ $R_{12}=57$ $R_{13}=85$ $R_{14}=95$ $R_{15}=79$
 Color Quality Scale: $Q_a=80.2$, $Q_f=80.1$, $Q_p=80.9$, $Q_g=91.0$
 $Q_1=84$ $Q_2=99$ $Q_3=77$ $Q_4=69$ $Q_5=75$ $Q_6=79$ $Q_7=85$ $Q_8=90$
 $Q_9=96$ $Q_{10}=86$ $Q_{11}=81$ $Q_{12}=80$ $Q_{13}=81$ $Q_{14}=71$ $Q_{15}=77$

Product Spec: 30W

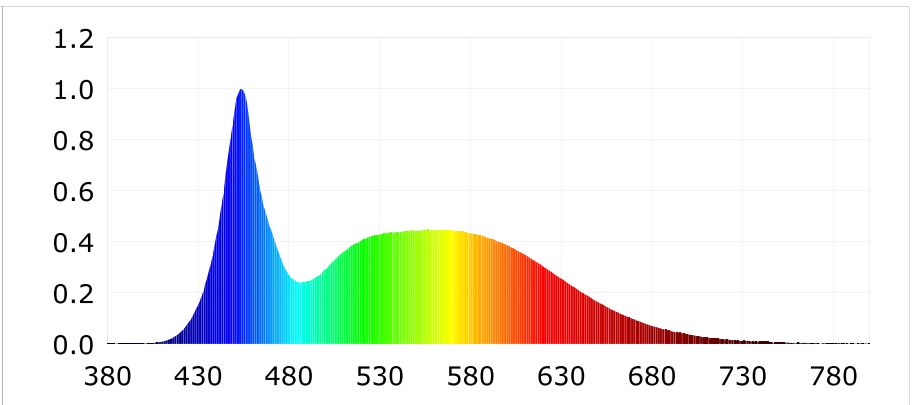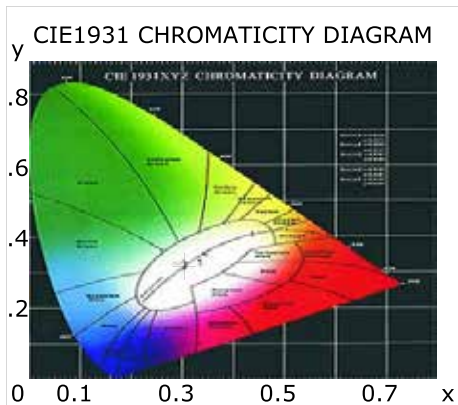

Photometric Parameters

Luminous Flux: 2781.53 lm
EEI: 0.15
Pupil Flux: 5394.68 Plm

Efficiency: 92.50 lm/W
Energy Efficiency Class: A+ (EU 874-2012)
Pupil Lumens Per Watt: 179.40 Plm/W
Radiant Power: 9.151 W
Pupil Factor (Kp): 1.939

Electric Parameters

Voltage: 126.70V
Power Factor: 0.9790

Current: 0.2420A
Frequency: 60.00Hz
Power: 30.07W

Test Information

Scan Range: 380~800:1nm
Stabilization Time: 0 Min
Max of Signal: 46343 (2154)

Photometric Method: sphere-spectroradiometer
Photometric Condition: Sphere diameter: 1.50m, 4PI
CCD Integration Time: 308.98 ms