



Características	
Modelo	RZH-10W-BB
Categoría	Reflector LED
Material	AL+FE
Terminado	NEGRO
Pantalla	0
Índice de Protección [IP]	IP65
Base	N/A
Dimensiones mm	112*109*40mm
Lúmenes	1000Lm
Temperatura	6500K
Parametros Eléctricos	
Tensión Nominal [V~]	85-305V~
Consumo de Potencia [W]	10W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	0.11-0.3A
Temperatura de Operación	0 - 40 °C
Beneficios	
Garantía	3 años de Garantía
Certificación	NOM



Product Infomation

Product Type: RZH-10W
Product Spec: 10W

Product Number: 11

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3151$ $y=0.3235$ $u(u')=0.2016$ $v=0.3105$ $v'=0.4657$
 CCT: $T_c=6414K$ ($duv=-0.00091$) Color Ratio: $R=0.138$ $G=0.806$ $B=0.056$
 Peak Wavelength: 451.5nm Half Bandwidth: 22.9nm
 Dominant Wavelength: 484.4nm Color Purity: 0.069
 CRI: $R_a=83.2$, $avgR(1\sim14)=76.0$, $avgR(1\sim15)=76.2$ TM30: $R_f=79$, $R_g=95$
 $R_1=82$ $R_2=89$ $R_3=91$ $R_4=83$ $R_5=83$ $R_6=82$ $R_7=87$ $R_8=69$
 $R_9=7$ $R_{10}=71$ $R_{11}=82$ $R_{12}=58$ $R_{13}=85$ $R_{14}=95$ $R_{15}=79$
 Color Quality Scale: $Q_a=79.2$, $Q_f=78.9$, $Q_p=80.3$, $Q_g=91.8$
 $Q_1=84$ $Q_2=98$ $Q_3=75$ $Q_4=67$ $Q_5=75$ $Q_6=80$ $Q_7=86$ $Q_8=90$
 $Q_9=95$ $Q_{10}=84$ $Q_{11}=79$ $Q_{12}=78$ $Q_{13}=79$ $Q_{14}=70$ $Q_{15}=75$

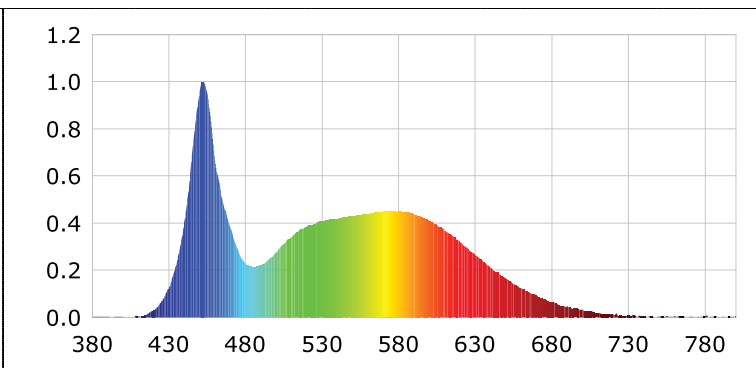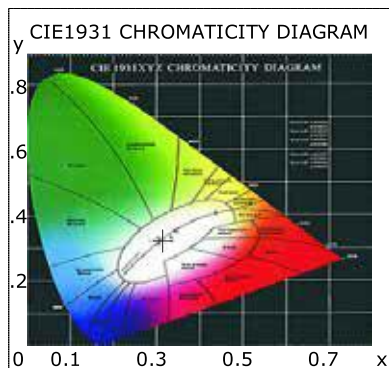

Photometric Parameters

Luminous Flux: 1168.00 lm Efficiency: 111.77 lm/W Radiant Power: 3.758 W
 EEI: 0.12 Energy Efficiency Class: A+ (EU 874-2012)
 Pupil Flux: 2172.71 Plm Pupil Lumens Per Watt: 207.91 Plm/W Pupil Factor (Kp): 1.860

Electric Parameters

Voltage: 126.90V Current: 0.0920A Power: 10.45W
 Power Factor: 0.8930 Frequency: 60.00Hz

Test Infomation

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 Min Photometric Condition: Sphere diameter: 1.50m, 4PI
 Max of Signal: 45427 (3335) CCD Integration Time: 802.62 ms