



Características	
Modelo	RZH-150W
Categoría	Reflector LED
Material	AL+FE
Terminado	NEGRO
Pantalla	0
Índice de Protección [IP]	IP65
Base	N/A
Dimensiones mm	350*305*86mm
Lúmenes	100Lm/w
Temperatura	6500K
Parametros Eléctricos	
Tensión Nominal [V~]	85-305V~
Consumo de Potencia [W]	150W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	1.76-0.46A
Temperatura de Operación	0 - 40 °C
Beneficios	
Garantía	3 años de Garantía
Certificación	NOM


### Product Infomation

Product Type: RZH-150W  
Product Spec: 150W

Product Number: 1

### CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.3166$   $y=0.3273$   $u(u')=0.2012$   $v=0.3120$   $v'=0.4680$   
 CCT:  $T_c=6306K$  ( $duv=0.00036$ ) Color Ratio:  $R=0.137$   $G=0.808$   $B=0.055$   
 Peak Wavelength: 451.3nm Half Bandwidth: 22.4nm  
 Dominant Wavelength: 496.7nm Color Purity: 0.061  
 CRI:  $R_a=82.5$ ,  $avgR(1\sim14)=74.9$ ,  $avgR(1\sim15)=75.1$  TM30:  $R_f=79$ ,  $R_g=94$   
 $R_1=81$   $R_2=88$   $R_3=91$   $R_4=82$   $R_5=82$   $R_6=82$   $R_7=87$   $R_8=68$   
 $R_9=3$   $R_{10}=70$   $R_{11}=81$   $R_{12}=57$   $R_{13}=83$   $R_{14}=95$   $R_{15}=77$   
 Color Quality Scale:  $Q_a=79.1$ ,  $Q_f=78.9$ ,  $Q_p=80.0$ ,  $Q_g=91.4$   
 $Q_1=83$   $Q_2=98$   $Q_3=75$   $Q_4=68$   $Q_5=76$   $Q_6=80$   $Q_7=85$   $Q_8=89$   
 $Q_9=96$   $Q_{10}=84$   $Q_{11}=79$   $Q_{12}=78$   $Q_{13}=79$   $Q_{14}=69$   $Q_{15}=74$

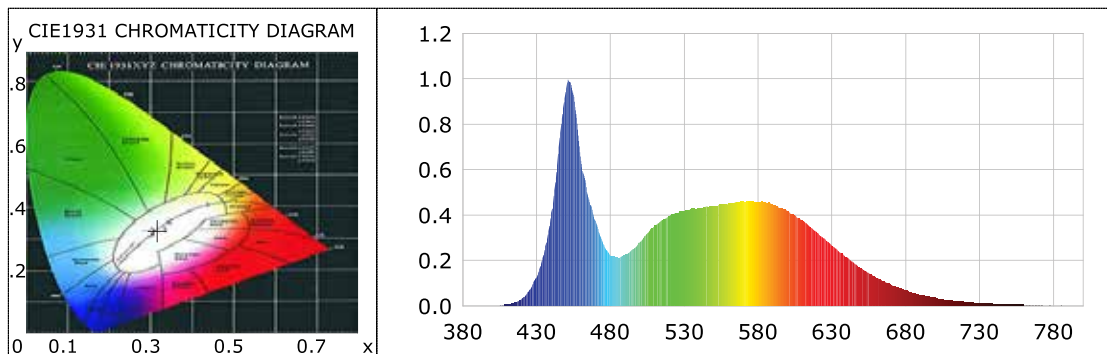

### Photometric Parameters

Luminous Flux: 17460.42 lm Efficiency: 112.00 lm/W Radiant Power: 55.781 W  
 EEI: 0.12 Energy Efficiency Class: A+ (EU 874-2012)  
 Pupil Flux: 32224.33 Plm Pupil Lumens Per Watt: 206.70 Plm/W Pupil Factor (Kp): 1.846

### Electric Parameters

Voltage: 126.70V Current: 1.2870A Power: 155.90W  
 Power Factor: 0.9570 Frequency: 60.00Hz

### Test Infomation

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer  
 Stabilization Time: 0 Min Photometric Condition: Sphere diameter: 1.50m, 4PI  
 Max of Signal: 45426 (2614) CCD Integration Time: 57.60 ms