



Características	
Modelo	RZH-30W-SR
Categoría	Reflector con sensor
Material	AL+FE
Terminado	NEGRO
Pantalla	0
Índice de Protección [IP]	IP65
Base	N/A
Dimensiones mm	185*232*44mm
Lúmenes	100Lm/w
Temperatura	6500K
Parametros Eléctricos	
Tensión Nominal [V~]	85-305V~
Consumo de Potencia [W]	30W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	0.35-0.09A
Temperatura de Operación	0 - 40 °C
Beneficios	
Garantía	3 años de Garantía
Certificación	NOM



Product Infomation

Product Type: RZH-30W-SR
Product Spec: 30W

Product Number: 12

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3167$ $y=0.3270$ $u(u')=0.2014$ $v=0.3119$ $v'=0.4679$
 CCT: $T_c=6304K$ ($duv=0.00018$) Color Ratio: $R=0.137$ $G=0.808$ $B=0.054$
 Peak Wavelength: 451.4nm Half Bandwidth: 22.9nm
 Dominant Wavelength: 486.7nm Color Purity: 0.061
 CRI: $R_a=82.3$, $avgR(1\sim14)=74.7$, $avgR(1\sim15)=74.9$ TM30: $R_f=79$, $R_g=94$
 $R_1=81$ $R_2=88$ $R_3=91$ $R_4=82$ $R_5=82$ $R_6=82$ $R_7=86$ $R_8=68$
 $R_9=2$ $R_{10}=70$ $R_{11}=81$ $R_{12}=57$ $R_{13}=83$ $R_{14}=95$ $R_{15}=77$
 Color Quality Scale: $Q_a=78.8$, $Q_f=78.6$, $Q_p=79.7$, $Q_g=91.3$
 $Q_1=83$ $Q_2=98$ $Q_3=75$ $Q_4=68$ $Q_5=75$ $Q_6=80$ $Q_7=85$ $Q_8=89$
 $Q_9=95$ $Q_{10}=84$ $Q_{11}=78$ $Q_{12}=78$ $Q_{13}=78$ $Q_{14}=68$ $Q_{15}=74$

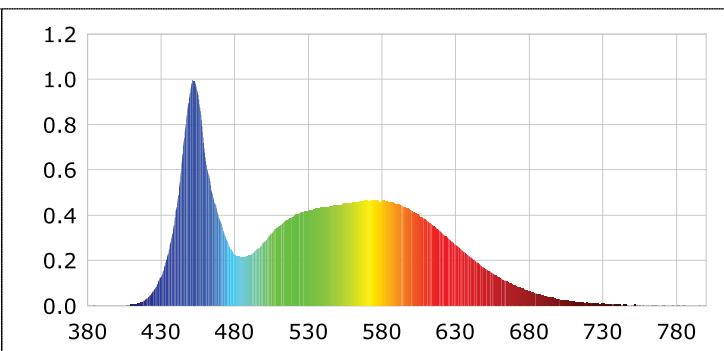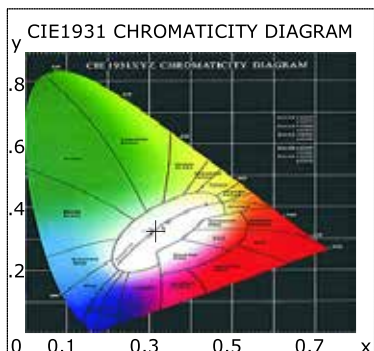

Photometric Parameters

Luminous Flux: 3293.49 lm Efficiency: 97.33 lm/W Radiant Power: 10.479 W
 EEI: 0.14 Energy Efficiency Class: A+ (EU 874-2012)
 Pupil Flux: 6071.16 Plm Pupil Lumens Per Watt: 179.41 Plm/W Pupil Factor (Kp): 1.843

Electric Parameters

Voltage: 126.90V Current: 0.2740A Power: 33.84W
 Power Factor: 0.9720 Frequency: 59.98Hz

Test Infomation

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 Min Photometric Condition: Sphere diameter: 1.50m, 4PI
 Max of Signal: 45913 (2901) CCD Integration Time: 310.80 ms