



Características	
Modelo	LMS-017
Categoría	Muro Exterior Cubierto LED
Material	AL+PC
Terminado	BLANCO,GRIS
Pantalla	0
Índice de Protección [IP]	IP54
Base	N/A
Dimensiones mm	170*80 mm
Lúmenes	N/A
Temperatura	3000K
Parámetros Eléctricos	
Tensión Nominal [V~]	100-240V~
Consumo de Potencia [W]	6W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	0.06A
Temperatura de Operación	0 - 40 °C
Beneficios	
Garantía	2 Años de Garantía
Certificación	NOM



Product Information

Product Type: LMS-017G2
Product Spec: 6W

Product Number: 32

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4348$ $y=0.4134$ $u(u')=0.2453$ $v=0.3498$ $v'=0.5247$
 CCT: $T_c=3111K$ ($duv=0.00399$) Color Ratio: $R=0.221$ $G=0.755$ $B=0.025$
 Peak Wavelength: 599.0nm Half Bandwidth: 138.9nm
 Dominant Wavelength: 581.0nm Color Purity: 0.546
 CRI: $R_a=82.9$, $avgR(1\sim14)=76.7$, $avgR(1\sim15)=76.5$ TM30: $R_f=84$, $R_g=95$
 $R_1=81$ $R_2=89$ $R_3=97$ $R_4=82$ $R_5=81$ $R_6=87$ $R_7=85$ $R_8=61$
 $R_9=7$ $R_{10}=75$ $R_{11}=82$ $R_{12}=67$ $R_{13}=82$ $R_{14}=98$ $R_{15}=73$
 Color Quality Scale: $Q_a=83.6$, $Q_f=85.5$, $Q_p=82.7$, $Q_g=89.3$
 $Q_1=79$ $Q_2=95$ $Q_3=85$ $Q_4=82$ $Q_5=84$ $Q_6=84$ $Q_7=85$ $Q_8=89$
 $Q_9=96$ $Q_{10}=91$ $Q_{11}=88$ $Q_{12}=86$ $Q_{13}=85$ $Q_{14}=72$ $Q_{15}=75$

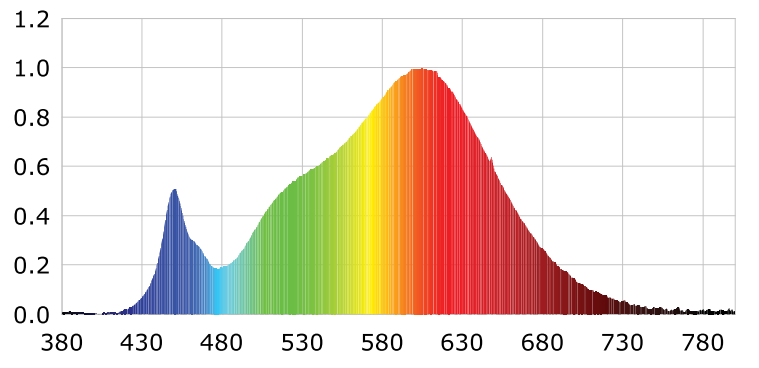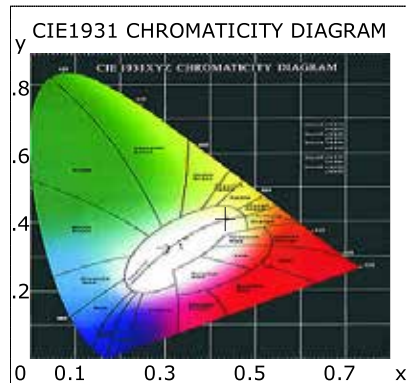

Photometric Parameters

Luminous Flux: 567.33 lm Efficiency: 82.58 lm/W Radiant Power: 1.683 W
 EEI: 0.14 Energy Efficiency Class: A+ (EU 874-2012)
 Pupil Flux: 720.89 Plm Pupil Lumens Per Watt: 104.93 Plm/W Pupil Factor (Kp): 1.271

Electric Parameters

Voltage: 127.10V Current: 0.0950A Power: 6.87W
 Power Factor: 0.5680 Frequency: 60.00Hz

Test Information

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 Min Photometric Condition: Sphere diameter: 1.50m, 4PI
 Max of Signal: 46196 (4760) CCD Integration Time: 3339.17 ms