





Product Type: SML-403G1
Product Number: 43

Características	
Modelo	SML-403
Aplicación	Muro Para Interior LED
Material	Al + CR
Terminado	BLANCO,GRIS
Pantalla	0
Indice de Protección [IP]	IP44
Base	N/A
Dimensiones mm	200*80*100 mm
Lúmenes	N/A
Temperatura	3000K
Parámetros Eléctricos	
Tensión Nominal [V~]	100-240V~
Consumo de Potencia [W]	6W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	0.06A
Temperatura de Operación	0 - 40 °C
Beneficios	
Garantía	2 años de Garantía
Certificación	NOM

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4386$ $y=0.4022$ $u(u')=0.2525$ $v=0.3473$ $v'=0.5209$
 CCT: $T_c=2957K$ ($duv=-0.00097$) Color Ratio: $R=0.232$ $G=0.741$ $B=0.027$
 Peak Wavelength: 604.7nm Half Bandwidth: 120.8nm
 Dominant Wavelength: 583.4nm Color Purity: 0.523
 CRI: $R_a=81.9$, $avgR(1\sim14)=76.7$, $avgR(1\sim15)=76.4$ TM30: $R_f=82$, $R_g=94$
 $R_1=81$ $R_2=92$ $R_3=95$ $R_4=79$ $R_5=81$ $R_6=91$ $R_7=80$ $R_8=57$
 $R_9=4$ $R_{10}=82$ $R_{11}=78$ $R_{12}=73$ $R_{13}=83$ $R_{14}=98$ $R_{15}=73$
 Color Quality Scale: $Q_a=81.9$, $Q_f=83.6$, $Q_p=83.0$, $Q_g=90.5$
 $Q_1=78$ $Q_2=94$ $Q_3=84$ $Q_4=79$ $Q_5=82$ $Q_6=83$ $Q_7=83$ $Q_8=86$
 $Q_9=95$ $Q_{10}=90$ $Q_{11}=86$ $Q_{12}=83$ $Q_{13}=82$ $Q_{14}=71$ $Q_{15}=73$

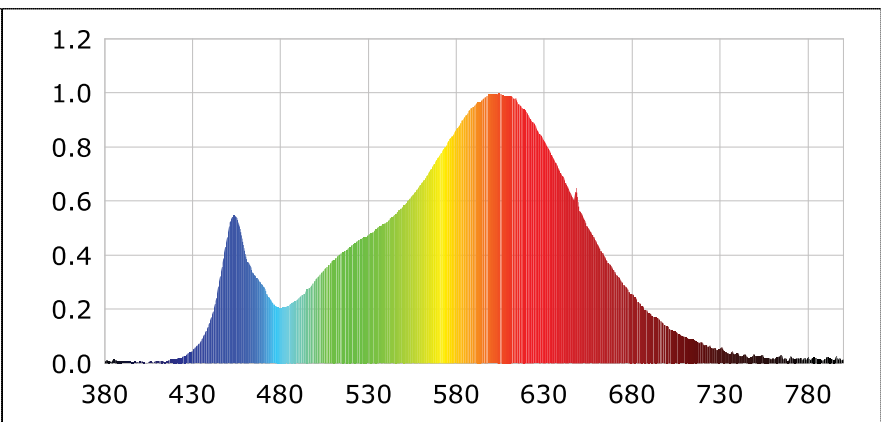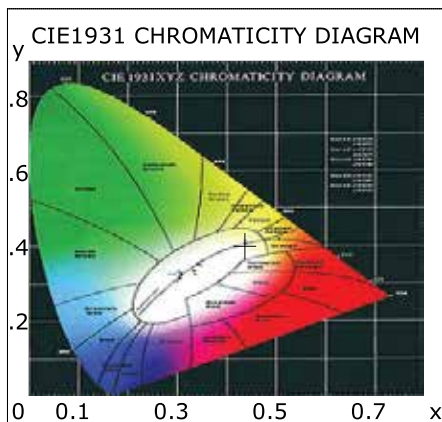

Photometric Parameters

Luminous Flux: 402.73 lm Efficiency: 56.48 lm/W Radiant Power: 1.221 W
 EEI: 0.19 Energy Efficiency Class: A (EU 874-2012)
 Pupil Flux: 507.34 Plm Pupil Lumens Per Watt: 71.16 Plm/W Pupil Factor (Kp): 1.260

Electric Parameters

Voltage: 127.20V Current: 0.0980A Power: 7.13W
 Power Factor: 0.5740 Frequency: 60.00Hz

Test Information

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 Min Photometric Condition: Sphere diameter: 1.50m, 4PI
 Max of Signal: 47275 (5027) CCD Integration Time: 4544.14 ms