





Product Type: SML-404B1
Product Number: 59

Características	
Modelo	SML-404
Aplicación	Muro Para Interior LED
Material	AL
Terminado	BLANCO,GRIS
Pantalla	0
Indice de Protección [IP]	IP20
Base	N/A
Dimensiones mm	160*64*80 mm
Lúmenes	N/A
Temperatura	3000K
Parámetros Eléctricos	
Tensión Nominal [V~]	100-240V~
Consumo de Potencia [W]	5W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	0.50A
Temperatura de Operación	0 - 40 °C
Beneficios	
Garantía	2 años de Garantía
Certificación	NOM

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4511$ $y=0.4109$ $u(u')=0.2567$ $v=0.3508$ $v'=0.5262$
 CCT: $T_c=2829K$ ($duv=0.00093$) Color Ratio: $R=0.239$ $G=0.739$ $B=0.022$
 Peak Wavelength: 613.9nm Half Bandwidth: 123.0nm
 Dominant Wavelength: 583.3nm Color Purity: 0.587
 CRI: $R_a=82.0$, $avgR(1\sim14)=76.4$, $avgR(1\sim15)=76.2$ TM30: $R_f=83$, $R_g=96$
 $R_1=80$ $R_2=90$ $R_3=97$ $R_4=80$ $R_5=80$ $R_6=88$ $R_7=82$ $R_8=58$
 $R_9=6$ $R_{10}=77$ $R_{11}=80$ $R_{12}=71$ $R_{13}=82$ $R_{14}=99$ $R_{15}=72$
 Color Quality Scale: $Q_a=82.2$, $Q_f=84.2$, $Q_p=83.2$, $Q_g=90.6$
 $Q_1=77$ $Q_2=95$ $Q_3=83$ $Q_4=81$ $Q_5=83$ $Q_6=83$ $Q_7=83$ $Q_8=86$
 $Q_9=95$ $Q_{10}=90$ $Q_{11}=87$ $Q_{12}=84$ $Q_{13}=83$ $Q_{14}=71$ $Q_{15}=73$

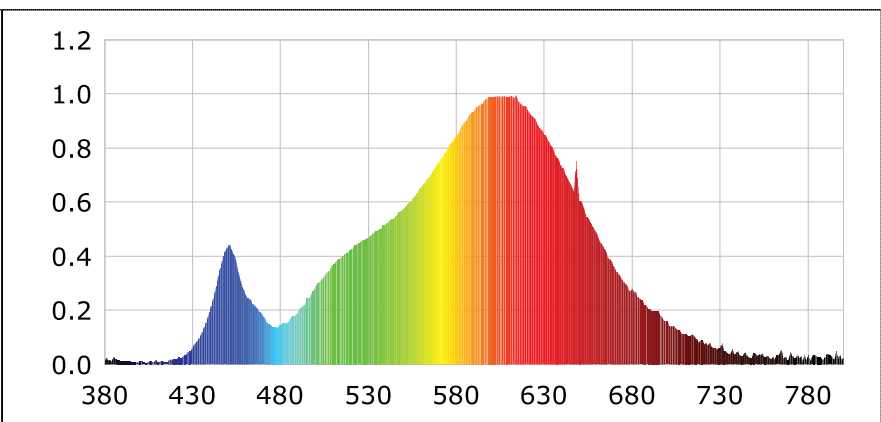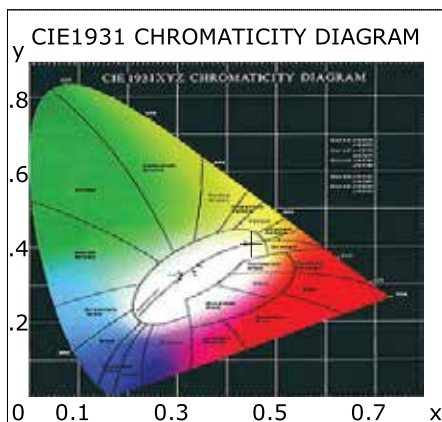

Photometric Parameters

Luminous Flux: 294.84 lm Efficiency: 47.25 lm/W Radiant Power: 0.897 W
 EEI: 0.21 Energy Efficiency Class: A (EU 874-2012)
 Pupil Flux: 350.89 Plm Pupil Lumens Per Watt: 56.23 Plm/W Pupil Factor (Kp): 1.190

Electric Parameters

Voltage: 127.20V Current: 0.0870A Power: 6.24W
 Power Factor: 0.5620 Frequency: 60.00Hz

Test Information

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 Min Photometric Condition: Sphere diameter: 1.50m, 4PI
 Max of Signal: 29889 (5126) CCD Integration Time: 4883.54 ms