





Product Type: SML-405G1
Product Number: 65

| Características | |
|---------------------------|------------------------|
| Modelo | SML-405 |
| Aplicación | Muro Para Interior LED |
| Material | AL |
| Terminado | BLANCO,GRIS |
| Pantalla | 0 |
| Índice de Protección [IP] | IP20 |
| Base | N/A |
| Dimensiones mm | 310*64*80 mm |
| Lúmenes | N/A |
| Temperatura | 3000K |
| Parámetros Eléctricos | |
| Tensión Nominal [V~] | 100-240V~ |
| Consumo de Potencia [W] | 10W |
| Frecuencia Nominal [Hz] | 50/60Hz |
| Consumo de Corriente [A] | 0.10A |
| Temperatura de Operación | 0 - 40 °C |
| Beneficios | |
| Garantía | 2 años de Garantía |
| Certificación | NOM |

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4460$ $y=0.4068$ $u(u')=0.2553$ $v=0.3492$ $v'=0.5238$
 CCT: $T_c=2875K$ ($duv=-0.00009$) Color Ratio: $R=0.238$ $G=0.740$ $B=0.023$
 Peak Wavelength: 613.9nm Half Bandwidth: 119.6nm
 Dominant Wavelength: 583.4nm Color Purity: 0.560
 CRI: $R_a=82.6$, $avgR(1\sim14)=77.3$, $avgR(1\sim15)=77.0$ TM30: $R_f=83$, $R_g=97$
 $R_1=81$ $R_2=90$ $R_3=97$ $R_4=81$ $R_5=81$ $R_6=89$ $R_7=82$ $R_8=59$
 $R_9=8$ $R_{10}=78$ $R_{11}=81$ $R_{12}=73$ $R_{13}=83$ $R_{14}=99$ $R_{15}=73$
 Color Quality Scale: $Q_a=82.4$, $Q_f=84.1$, $Q_p=84.1$, $Q_g=91.9$
 $Q_1=77$ $Q_2=95$ $Q_3=83$ $Q_4=81$ $Q_5=84$ $Q_6=83$ $Q_7=83$ $Q_8=86$
 $Q_9=95$ $Q_{10}=89$ $Q_{11}=86$ $Q_{12}=84$ $Q_{13}=83$ $Q_{14}=72$ $Q_{15}=74$

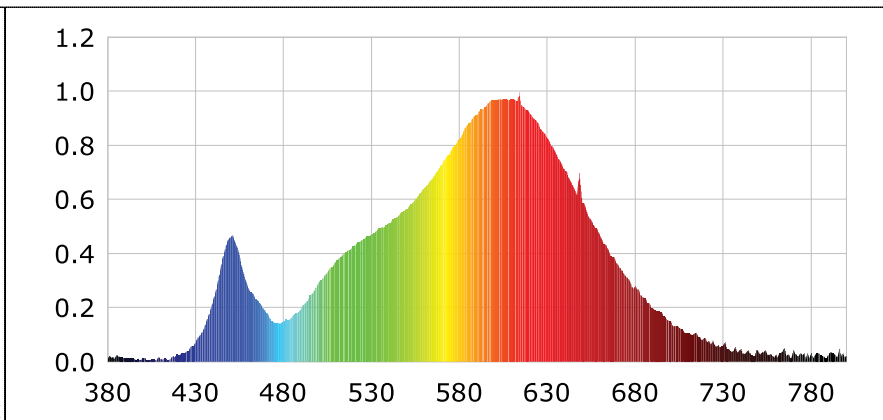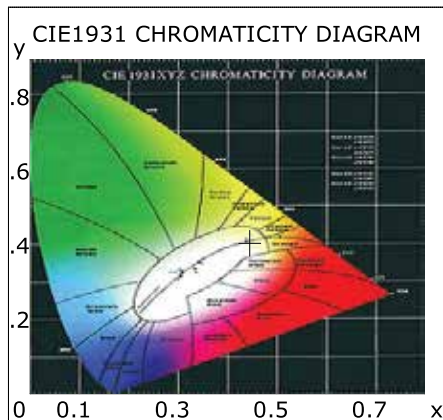

Photometric Parameters

Luminous Flux: 526.88 lm Efficiency: 47.08 lm/W Radiant Power: 1.612 W
 EEI: 0.24 Energy Efficiency Class: B (EU 874-2012)
 Pupil Flux: 638.97 Plm Pupil Lumens Per Watt: 57.10 Plm/W Pupil Factor (Kp): 1.213

Electric Parameters

Voltage: 127.00V Current: 0.0900A Power: 11.19W
 Power Factor: 0.9740 Frequency: 60.00Hz

Test Information

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 Min Photometric Condition: Sphere diameter: 1.50m, 4PI
 Max of Signal: 32189 (5166) CCD Integration Time: 5451.76 ms