





Product Type: SML-422G1
Product Number: 67

| Características | |
|---------------------------|------------------------|
| Modelo | SML-422 |
| Aplicación | Muro Para Interior LED |
| Material | AL |
| Terminado | NEG.BLC.GRIS |
| Pantalla | 0 |
| Indice de Protección [IP] | IP20 |
| Base | N/A |
| Dimensiones mm | 330*85*.35 mm |
| Lúmenes | N/A |
| Temperatura | 3000K |
| Parametros Eléctricos | |
| Tensión Nominal [V~] | 100-240V~ |
| Consumo de Potencia [W] | 9W |
| Frecuencia Nominal [Hz] | 50/60Hz |
| Consumo de Corriente [A] | 0.09A |
| Temperatura de Operación | 0 - 40 °C |
| Beneficios | |
| Garantía | 2 años de Garantía |
| Certificación | NOM |

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4457$ $y=0.4062$ $u(u')=0.2553$ $v=0.3490$ $v'=0.5235$
 CCT: $T_c=2875K$ ($duv=-0.00027$) Color Ratio: $R=0.239$ $G=0.739$ $B=0.022$
 Peak Wavelength: 610.8nm Half Bandwidth: 127.3nm
 Dominant Wavelength: 583.5nm Color Purity: 0.557
 CRI: $R_a=83.4$, $avgR(1\sim14)=78.3$, $avgR(1\sim15)=78.1$ TM30: $R_f=83$, $R_g=98$
 $R_1=82$ $R_2=90$ $R_3=97$ $R_4=83$ $R_5=82$ $R_6=89$ $R_7=83$ $R_8=61$
 $R_9=12$ $R_{10}=79$ $R_{11}=83$ $R_{12}=74$ $R_{13}=84$ $R_{14}=99$ $R_{15}=74$
 Color Quality Scale: $Q_a=82.9$, $Q_f=84.4$, $Q_p=85.0$, $Q_g=92.9$
 $Q_1=78$ $Q_2=95$ $Q_3=83$ $Q_4=82$ $Q_5=84$ $Q_6=84$ $Q_7=83$ $Q_8=86$
 $Q_9=96$ $Q_{10}=89$ $Q_{11}=87$ $Q_{12}=84$ $Q_{13}=84$ $Q_{14}=73$ $Q_{15}=74$

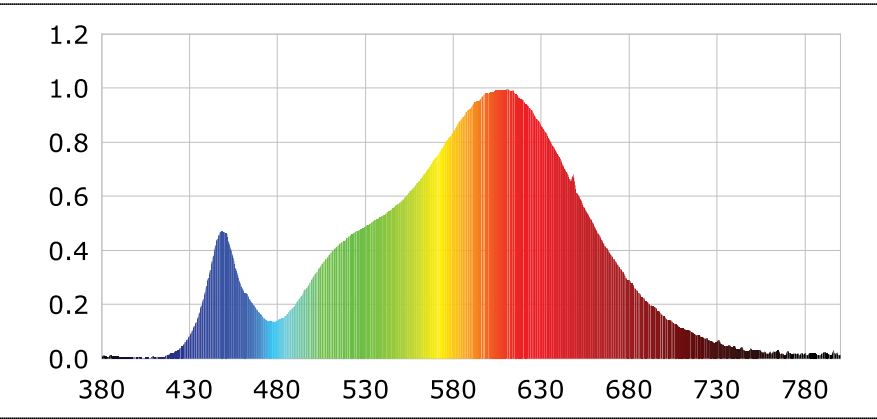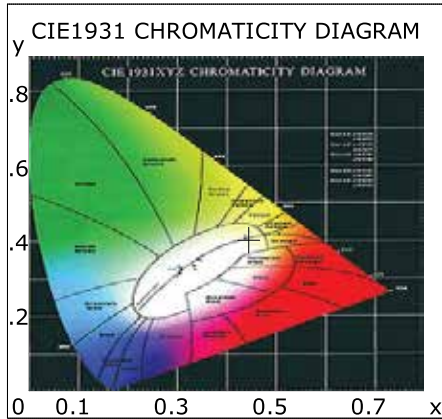

Photometric Parameters

Luminous Flux: 530.84 lm Efficiency: 59.05 lm/W Radiant Power: 1.630 W
 EEI: 0.19 Energy Efficiency Class: A (EU 874-2012)
 Pupil Flux: 644.07 Plm Pupil Lumens Per Watt: 71.64 Plm/W Pupil Factor (Kp): 1.213

Electric Parameters

Voltage: 127.10V Current: 0.0730A Power: 8.99W
 Power Factor: 0.9670 Frequency: 60.00Hz

Test Information

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 Min Photometric Condition: Sphere diameter: 1.50m, 4PI
 Max of Signal: 48590 (5087) CCD Integration Time: 3938.89 ms